
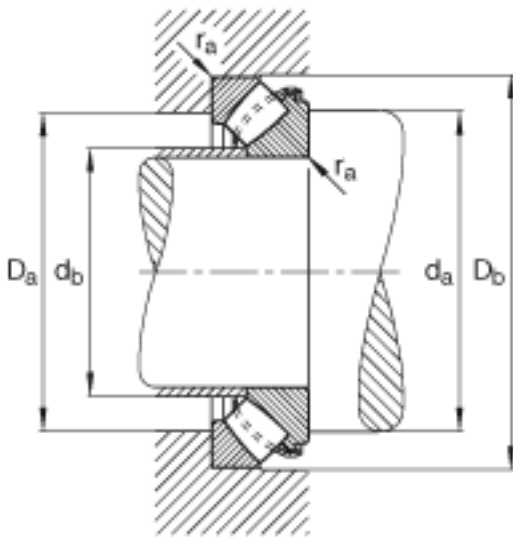


### FAG 29428-E1参数

尺寸	d	140	mm	-	
	D	280	mm	-	
	T	85	mm	-	
	A	86	mm	-	
	D <sub>1</sub>	194.5	mm	-	
	D <sub>a max</sub>	237	mm	-	
	D <sub>b min</sub>	285	mm	-	
	d <sub>1</sub>	251.1	mm	-	
	d <sub>a min</sub>	205	mm	-	
	d <sub>b max</sub>	154	mm	-	
	d <sub>b1 max</sub>	162	mm	-	
	r <sub>a max</sub>	3	mm	-	
	r <sub>min</sub>	4	mm	-	
	T <sub>1</sub>	41	mm	-	
	T <sub>3</sub>	54	mm	-	
	T <sub>5</sub>	74.5	mm	-	
	重量	m	22100	g	质量
	基本额定载荷	C <sub>a</sub>	1720000	N	基本额定动载荷, 轴向
		C <sub>0a</sub>	4500000	N	基本额定静载荷, 轴向
	极限转速	n <sub>G</sub>	2460	r/min	极限转速
参考转速	n <sub>B</sub>	1300	r/min	参考速度	
疲劳极限载荷	C <sub>ua</sub>	485000	N	疲劳极限载荷, 轴向	

### FAG 29428-E1图片

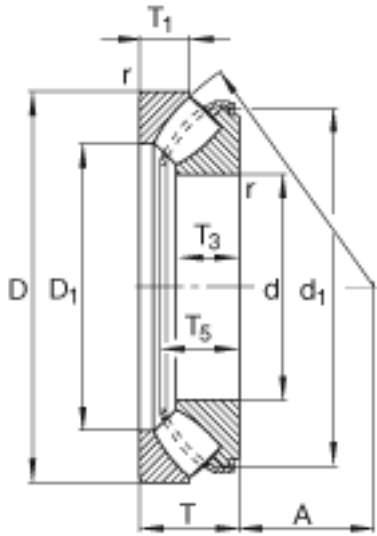

参考资料: <http://www.sozhou.com/p/2935cd83.html>

