
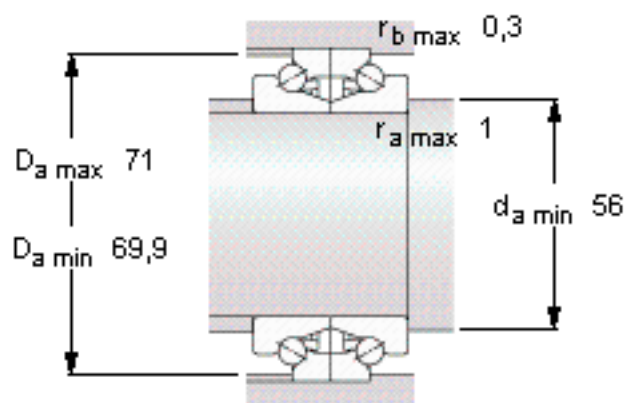


### SKF BTW 45 CTN9/SP参数

主要尺寸	d	45	mm	-
	D	75	mm	-
	H	38	mm	-
基本额定载荷	C	22100	N	动载荷
	$C_0$	54000	N	静载荷
疲劳载荷极限	$P_u$	2600	N	-
可达转速	Grease	9500	r/min	-
	Oil-air	12000	r/min	-
重量	重量	530	g	-
型号	型号	BTW 45 CTN9/SP	-	-

### SKF BTW 45 CTN9/SP图片

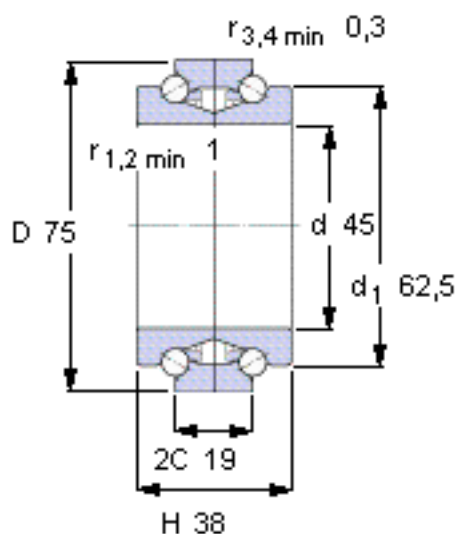

#### 未安装时的预载荷 [N]

390

#### Reference grease quantity [cm<sup>3</sup>]


$G_{ref}$  3,1

#### Static axial stiffness [N/μm]

(guideline value)

513

参考资料:<http://www.sozhou.com/p/383ea6a4.html>

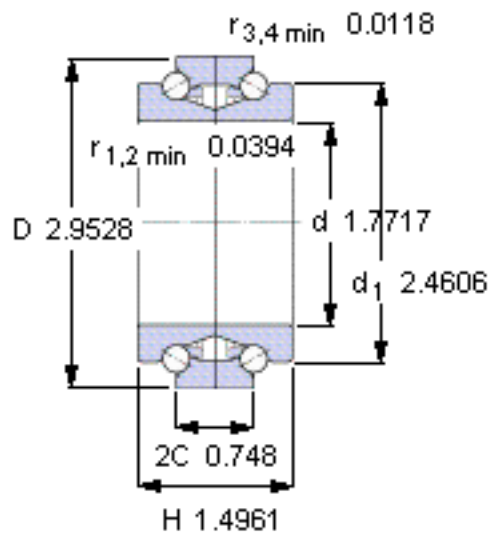


**未安装时的预载荷 [N]**

390

**Reference grease quantity [cm<sup>3</sup>]**

$G_{\text{ref}}$  3,1

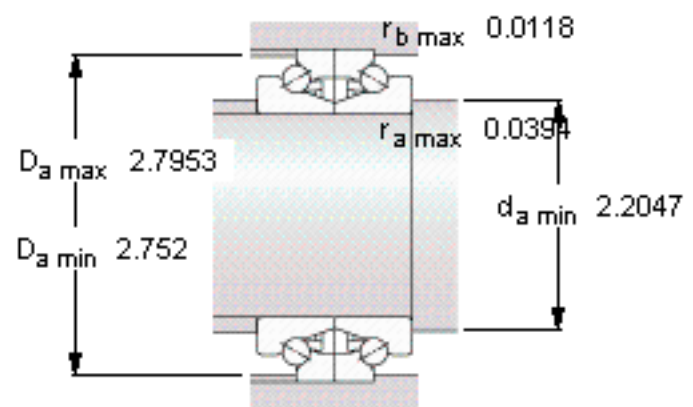

**Static axial stiffness [N/ $\mu\text{m}$ ]**

(guideline value)

513