
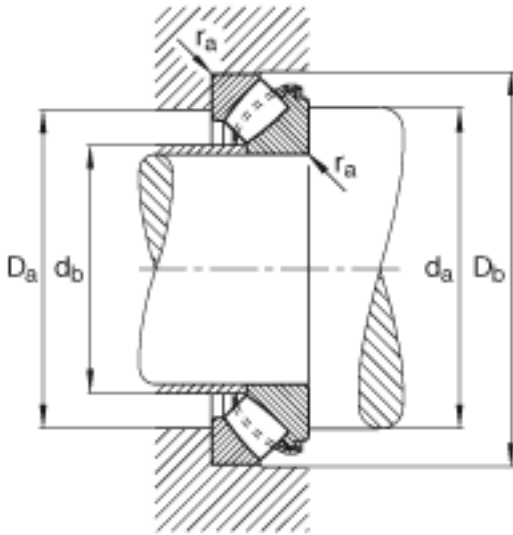


### FAG 29456-E1参数

尺寸	d	280	mm	-	
	D	520	mm	-	
	T	145	mm	-	
	A	166	mm	-	
	D <sub>1</sub>	372	mm	-	
	D <sub>a max</sub>	446	mm	-	
	D <sub>b min</sub>	530	mm	-	
	d <sub>1</sub>	473.1	mm	-	
	d <sub>a min</sub>	395	mm	-	
	d <sub>b max</sub>	302	mm	-	
	d <sub>b1 max</sub>	320	mm	-	
	r <sub>a max</sub>	5	mm	-	
	r <sub>min</sub>	6	mm	-	
	T <sub>1</sub>	70	mm	-	
	T <sub>3</sub>	95	mm	-	
	T <sub>5</sub>	130.5	mm	-	
	重量	m	126300	g	质量
	基本额定载荷	C <sub>a</sub>	5200000	N	基本额定动载荷, 轴向
		C <sub>0a</sub>	15800000	N	基本额定静载荷, 轴向
	极限转速	n <sub>G</sub>	1230	r/min	极限转速
参考转速	n <sub>B</sub>	610	r/min	参考速度	
疲劳极限载荷	C <sub>ua</sub>	1470000	N	疲劳极限载荷, 轴向	

### FAG 29456-E1图片

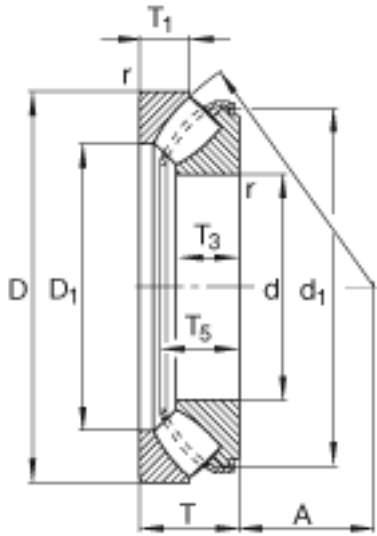

参考资料:<http://www.sozhou.com/p/7f0d4f39.html>

